


# Chute Hoists

## THE ROOFER HOISTS

model SC-300-cb  
model SC-605-cb  
model SC-905-cb

Install this counterweighted chute hoist on roofs, floor slabs, and through window openings.

360° View with Chute  
(without fishpole)

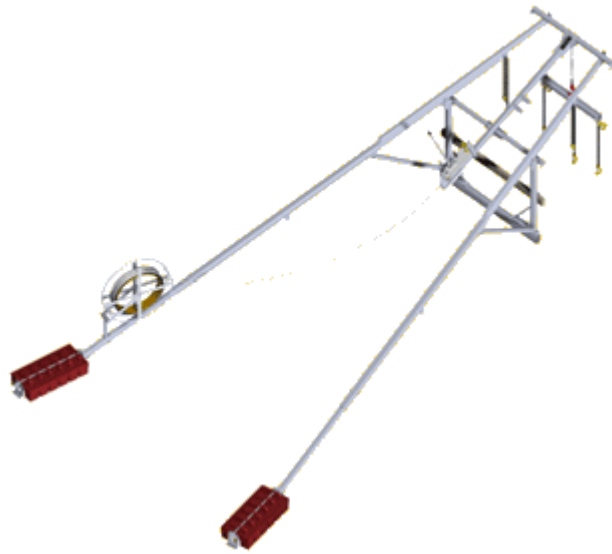

Model SC-905-cb shown with fishpole

US Patent 5,934,437 • CND Patent Application 2,177,741

Three models are available to lift & support up to:

- 300 lb. of chute
- 600 lb. of chute
- 900 lb. of chute

The length of chute that a hoist can support depends on the weight of the sections used. A section's weight is determined by its diameter, design & thickness. Height limits will be further reduced if steel liners are installed.


## Hoist in action!

The assembly is quick (10 minutes), and requires only a handful of identical locking pins. No tools are needed. The support frame features a 3:1 safety factor. A removable Fishpole allows the user to serve several frames of the same model with the same Fishpole. When not in use the entire frame is folded and stored as a few compact packets.



Click this image for a close-up.

**Model SC-300-cb can be safely installed on roofs with slopes of up to 5:12**

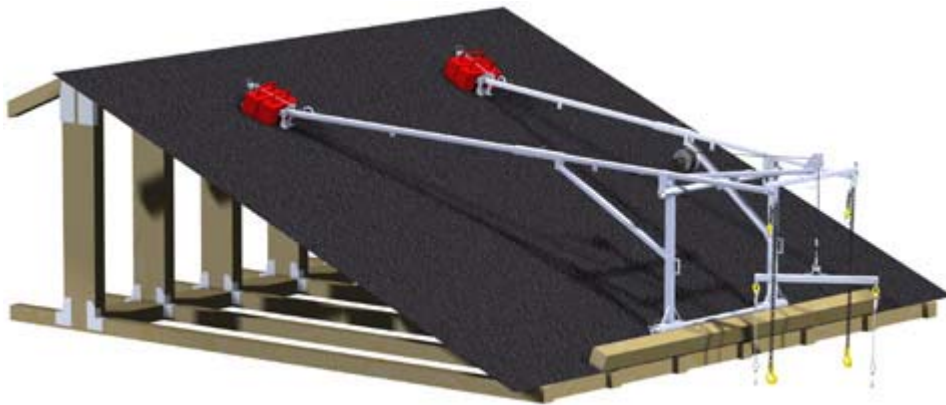

The arrangement of the weight beams gives the Roofer Hoist some special advantages: Because they are splayed apart, the hoist is very stable. Also, the weight beams are angled away from the roof deck, so they act as side guardrails towards the front of the hoist. These side guardrails help protect the worker from falls as he approaches the edge of the roof. As well, the weight beams only contact the roof deck in a 3 places, so roofing tear-offs can proceed with the hoist in place.

Roofer Hoists are designed to meet or exceed the requirements of OSHA, Part 1926-500/501/502, Subpart M & Appendix B, Fall Protection.

## Model SC-300-cb

[\*\*Click here for additional views & specs.\*\*](#)

Package	Includes	Weight
A	Frame + Spreader Bar	190 lb.
B	Counterweights (4 required - 55 lb. each)	220 lb.
C	Fishpole unit with drum winch & 60' cable	45 lb.
D	A + B + C = COMPLETE ROOFER HOIST	455 lb.

## Model SC-605-cb

[\*\*Click here for additional views & specs.\*\*](#)

Package	Includes	Weight
A	Frame + Spreader Bar	330 lb.
B	Counterweights (10 required - 55 lb. each)	550 lb.
C	Fishpole unit with drum winch & 100' cable	50 lb.
D	A + B + C = COMPLETE ROOFER HOIST	930 lb.

## Model SC-905-cb

[\*\*Click here for additional views & specs.\*\*](#)

Package	Includes	Weight
A	Frame + Spreader Bar	400 lb.
B	Counterweights (12 required - 55 lb. each)	660 lb.
C	Fishpole unit with traction winch & 150' cable	100 lb.
D	A + B + C = COMPLETE ROOFER HOIST	1160 lb.

**WARNING!** The information provided here is not a substitute for the installation manual that accompanies every hoist order. Read & understand the installation manual that is provided with the chute hoist before installing or using it.